


■ ブレーカー用圧着端子(CB型)

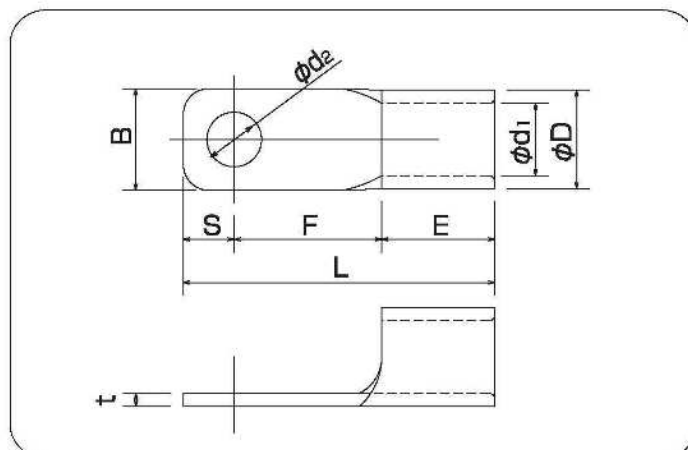

RoHSII P.1をご覧ください。

単位:mm

呼び	φd2	B	L	F	E	S	φD	φd1	t	電線適合容量 芯線mm ² (参考)	適合工具	一箱入数
22	CB22-5	5.3								16.78	9H-60 EP-1460 REC-LI60S	100
	CB22-6	6.4	12	30.9	13.4	11.5	6	11.5	7.7	1.8		
	CB22-8	8.4								26.66		
38	CB38-5	5.3								26.66		100
	CB38-6	6.4	13.5	36	16	13	7	13.3	9.4	1.8		
	CB38-8	6.4	12.5	34.5			5.5			42.42		
60	CB60-6	6.4								42.42		12号A 100
	CB60-8	8.4	16	49	23.2	17.8	8	15.5	11.4	1.9		
	CB60-10	10.5								60.57		
70	CB70-6	6.4								60.57	EP-150A REC-LI150 REC-LI200	100
	CB70-8	8.4	20.5	49	20	18		17.5	13.5	2.0		
	CB70-10	10.5								76.28		
	CB70-12	13								96.30		
80	CB80-8	8.4								76.28		12号A 50
	CB80-10	10.5		51	20			19.5	14.5	2.3		
	CB80-12	13				20	11			96.30		
100	CB100-8	8.4								96.30		
	CB100-10	10.5	22	53	22			22.3	16.4	2.6		
	CB100-12	13								117.20		
150	CB150-8	8.4								117.20	REC-LI325	30
	CB150-10	10.5		60.5	23	26.5		26.5	19.5	3.2		
	CB150-12	13								152.05		
200	CB200-8	8.4								152.05	REC-LI200	20
	CB200-10	10.5	36	72	22	32	18	32.7	24	4.0		
	CB200-12	13								242.27		
250	CB250-8	8.4									REC-LI250M	20
	CB250-10	10.5	40	82.5	31	31.5	20	35.6	26	4.5		
	CB250-12	13										
325	CB325-S10		38.5							242.27	REC-LI325 12号A	10
	CB325-10	10.5	44									
	CB325-S12		38.5	85.5	32	36.5	17	37.6	28	4.5		
	CB325-12	13	44							325.0		

(注意) 各部の寸法は予告なく変更することがあります。

・太字は、日本電機工業会規格JEM1399(低圧開閉器用裸圧着端子)準拠品です。