


■ ブレーカー用圧着端子(CB型)

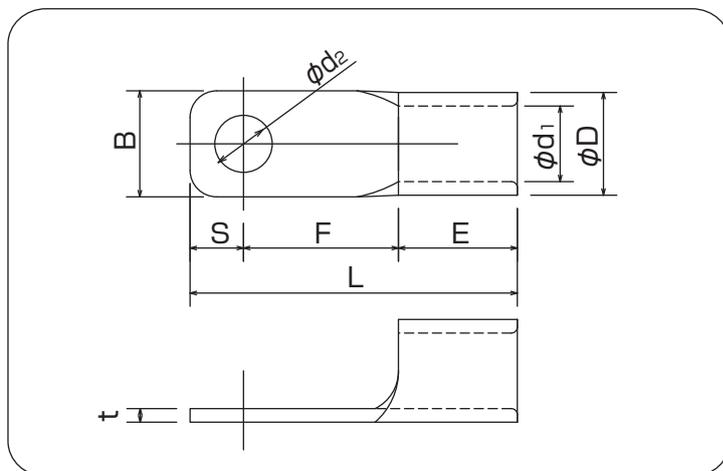

RoHS (22~60sq) **RoHS** (80~325sq)

単位:mm

呼び	ϕd_2	B	L	F	E	S	ϕD	ϕd_1	t	電線抱合容量 撚線mm ² (参考)	適合工具	一箱入数						
22	CB22-5	5.3	12	30.9	13.4	11.5	6	11.5	7.7	1.8	16.78	9H-60 EP-1460 REC-Li60	100					
	CB22-6	6.4												26.66				
	CB22-8	8.4																
38	CB38-5	5.3	13.5	36	16	13	7	13.3	9.4	1.8	26.66			9H-60 EP-1460 REC-Li60	100			
	CB38-6	6.4														42.42		
	CB38-S6	6.4	12.5	34.5	5.5													
60	CB60-6	6.4	16	49	23.2	17.8	8	15.5	11.4	1.9	42.42					9H-60 EP-1460 REC-Li60	100	
	CB60-8	8.4																60.57
	CB60-10	10.5																
80	CB80-8	8.4	22	51	20	20	11	19.5	14.5	2.3	76.28							EP-150A REC-150F REC-Li200
	CB80-10	10.5										96.30						
	CB80-12	13																
100	CB100-8	8.4	53	22	20	11	22.3	16.4	2.6	96.30	EP-150A REC-150F REC-Li200	50						
	CB100-10	10.5											117.20					
	CB100-12	13																
150	CB150-8	8.4	60.5	23	26.5	11	26.5	19.5	3.2	117.20			REC-Li200	12号A 12号H				
	CB150-10	10.5													152.05			
	CB150-12	13																
200	CB200-8	8.4	36	72	22	32	18	32.7	24	4.0					152.05	REC-Li200	20	
	CB200-10	10.5																242.27
	CB200-12	13																
325	CB325-S10	10.5	38.5	85.5	32	36.5	17	37.6	28	4.5					242.27			REC-Li325
	CB325-10		44															
	CB325-S12	13	38.5															
	CB325-12		44															

(注意) ・各部の寸法は予告なく変更することがあります。
 ・太字は、日本電機工業会規格JEM1399(低圧開閉器用裸圧着端子)準拠品です。