


S506 シリーズ S506 SERIES




定格一覧表 Fuse List

品名 Catalog No.		認可規格 Agency Approvals								
型名 Type No.	定格電圧 Voltage Rating	定格電流 Ampere Rating	電圧降下 Voltage Drop	PSE	UL	CCC	BSI	SEMKO	VDE	RoHS (※1)
S506	250V	32mA	1050							
		40mA	920							
		50mA	800							
		63mA	760							
		80mA	580							
		100mA	490							
		125mA	390							
		160mA	320							
		200mA	340							
		250mA	270							
		315mA	250							
		400mA	210							
		500mA	190							
		630mA	170							
		800mA	150							
		1A	90							
		1.25A	85							
		1.6A	85							
		2A	85							
		2.5A	85							
		3.15A	80							
4A	80									
5A	75									
6.3A	75									
8A	80									
10A	75									
12.5A	75									

※1 RoHS対応品は末尾にRを付ける
RoHS compliant products put "R" on the end.

溶断特性表

Melting characteristic table

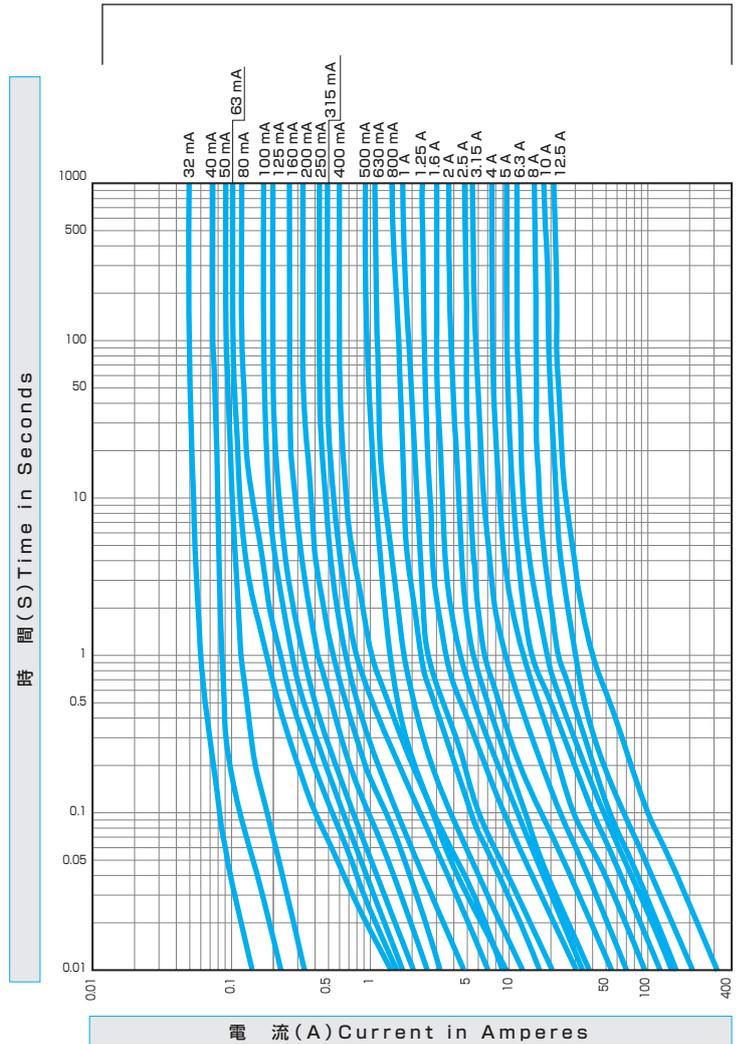

最小包装数
Minimum Package: 1000 Pcs.

電気的特性
Electrical Characteristics

Tタイプ
Type T

溶断 : 210% 2分以内
Clearing Time-Current : 2 minutes Max.

32mA ~ 100mA	275%	0.2 ~ 10 秒
	400%	0.04 ~ 3 秒
	1000%	0.01 ~ 0.3 秒
125mA ~ 12.5A	275%	0.6 ~ 10 秒
	400%	0.15 ~ 3 秒
	1000%	0.02 ~ 0.3 秒