


## 銅線用裸圧着端子(RD型)

高純度の銅条・銅板より製造される圧着端子で、R型・RD型はJIS規格、UL規格(カナダ向け認証含む)に適合しております。

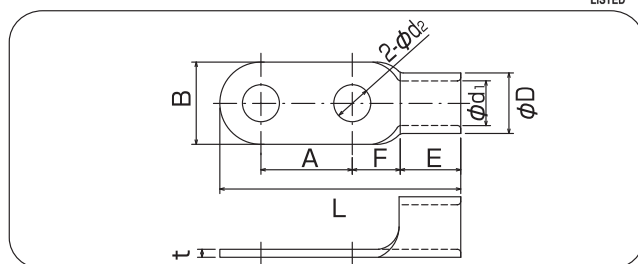

**RoHS II** P.1をご覧ください。

単位:mm

呼び	φd <sub>2</sub>	B	L	A	F	E	φD	φd <sub>1</sub>	t	電線抱合容量(参考)			適合工具	一箱入数		
										単線mm	撚線mm <sup>2</sup>	AWG				
38	RD38-0 △	—	22	84	—	—	13.5	13.3	9.4	1.8	5.81	26.66	2	9H-60		
	RD38-10	11			32	27.5					7.34	42.42				
	RD38-12	14			40	19.5					7.34	42.42				
60	RD60-S0 △	—	22	81	—	—	18.5	15.5	11.4	2.0	7.34	42.42	1/0	EP-1460 EP-150A REC-Li60S REC-Li150 REC-Li200		
	<b>RD60-10</b>	11			32	19.5									8.26	60.57
	RD60-L0 △	—	89	—	—	8.26										
	<b>RD60-12</b>	14		40	19.5										8.26	60.57
	RD60-LL0 △	—	32	97	—	—										
	<b>RD60-14</b>	16			40	22.5									8.26	60.57
70	RD70-S0 △	—	24	83	—	—	20	17.5	13.5	2.0	8.26	60.57	2/0	EP-150A REC-Li150 REC-Li200		
	RD70-10	11			32	19									9.27	76.28
	RD70-L0 △	—	91	—	—	9.27										
	RD70-12	14		40	19										9.27	76.28
	RD70-LL0 △	—	32	97	—	—										
	RD70-14	16			40	21									9.27	76.28
80	RD80-S0 △	—	27	86	—	—	20	19.5	14.5	2.3	9.27	76.28	3/0	EP-150A REC-Li150 REC-Li200		
	RD80-10	11			32	20.5									10.41	96.3
	RD80-L0 △	—	94	—	—	10.41										
	RD80-12	14		40	20.5										10.41	96.3
	RD80-LL0 △	—	32	99	—	—										
	RD80-14	16			40	23									10.41	96.3
100	RD100-S0 △	—	28.5	87	—	—	20	22.3	16.4	2.6	10.41	96.3	4/0	EP-150A REC-Li150 REC-Li200 <i>12号A</i>		
	<b>RD100-10</b>	11			32	20.75									11.68	117.2
	RD100-L0 △	—	95	—	—	11.68										
	<b>RD100-12</b>	14		40	20.75										11.68	117.2
	RD100-LL0 △	—	32	99	—	—										
	<b>RD100-14</b>	16			40	23									11.68	117.2
150	RD150-0 △	—	36	105.5	—	—	26.5	26.5	19.5	3.2	11.68	117.2	250-300 MCM	REC-Li325 <i>12号A</i>		
	<b>RD150-12</b>	14			40	21									13.8	152.05
	<b>RD150-14</b>	16			40	21										
180	RD180-0 △	—	38.5	111	—	—	30.5	28.5	22	3.2	13.8	152.05	350 MCM	REC-Li325 <i>12号A</i>		
	RD180-12	14			40	21.25									15.6	192.6
	RD180-14	16			40	21.25										
200	RD200-0 △	—	44	117	—	—	32	32.7	24	4.0	15.6	192.6	400 MCM	REC-Li200		
	<b>RD200-12</b>	14			40	23									17.5	242.27
	<b>RD200-14</b>	16			40	23										
250	RD250-12△	14	44	118	40	24.5	31.5	35.6	26	4.5	—	250	500 MCM	REC-Li250M		
	RD250-14△	16			40	24.5					—	250				
325	RD325-0 △	—	50.5	124	—	—	36.5	37.6	28	4.5	17.5	242.27	500-600 MCM	REC-Li325 <i>12号A</i>		
	<b>RD325-12</b>	14			40	22.25									20.3	325.0
	<b>RD325-14</b>	16			40	22.25										

(注意) ・各部の寸法は予告なく変更することがあります。・太字は、JIS規格品です。・呼びS0,L0,LL0にはd2穴がありません。  
・UL登録品として御使用の場合、ご注文時にご指示下さい。・△はUL登録品ではありません。・斜体はUL登録工具です。詳しくはパッケージの説明書をご覧ください。