


# 銅つめ付 ヒューズ(甲型)

Link Fuses

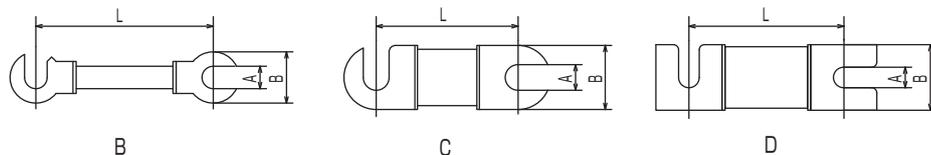

単位:mm  
Unit

定格電流 Ampere Rating	L	A	B	タイプ Type	定格電圧 Voltage Rating	溶断時間(分) Clearing Time-Current(min)		一箱入数 Package
						160%	200%	
5 A	45	5.5	12	B	250V	60	2	100
10 A								
15 A								
20 A								
30 A								
40 A	55	7	16	C		120	4	50
50 A								
60 A								
75 A								
100 A								
150 A	75	8.5	20	D	120	6	30	
200 A								
250 A								
300 A								
400 A								
500 A	10	25	32	D	120	8	10	
150 A								
200 A								
250 A								
300 A								
400 A	10	25	32	D	120	10	10	
500 A								

※ 寸法公差：電気用品安全法技術基準参照。

Dimensional tolerance: Refer to Technological Standard of Electrical Appliance and Material Safety Law.

★ 銅つめ付ヒューズのL寸法は標準仕様です。その他のL寸法使用についてはお問い合わせ下さい。

Size L of the link fuse is a standard size. Please inquire about other size L.