


ナイロン絶縁被覆付圧着端子 INSULATED TERMINALS

■ 絶縁被覆付先開型圧着端子(NBT型)

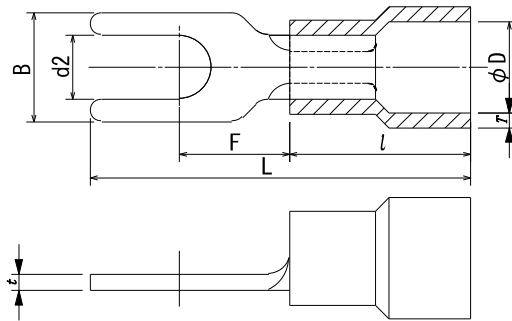

単位: mm

呼び	標準色	d ₂	B	L	F	φD	l	T	撚線		適合工具	t			
									mm ²	AWG					
1.25	赤	3.3	5.8	20.2	5.5	4.2	10.0	0.75	0.25 ∩ 1.65	22-16	3D	0.75			
		NBT1.25-YAS3	5.7	20.2	5.7										
		NBT1.25-YASS3.5	6.4												
		NBT1.25-YAS3.5	7.4	19.0	5.5										
		NBT1.25-Y3.5	6.4		5.7										
		NBT1.25-YASS4	6.8	20.2	5.5										
		NBT1.25-YAS4	8.0												
		NBT1.25-YA4	5.3	7.8	6										
2	青	3.3	5.8	20.7	6.2	4.6	10.0	0.75	1.04 ∩ 2.63	16-14	4D	0.8			
		NBT2-YAS3	5.7												
		NBT2-YASS3.5	6.4												
		NBT2-YAS3.5	6.8												
		NBT2-YASS4	8.0												
		NBT2-YAS4	5.3										8.1	6.3	
		NBT2-YAS5	6.4										11.0	24.7	8.3
		NBT2-YAS6													
5.5	黄	4.3	7.3	26.2	7.1	6.6	14.0	0.75	2.63 ∩ 6.64	12-10	5	0.95			
		NBT5.5-YAS4	8.3		6.6										
		NBT5.5-YAS5													
		NBT5.5-YAS6	6.4	12.0	32.7								12.0		

富士端子工業株式会社