


T形コネクタ

- ・ 屋内、屋外(配電線を除く)分岐、ビルディング、トンネル内の配線の分岐コネクタとして最適です。

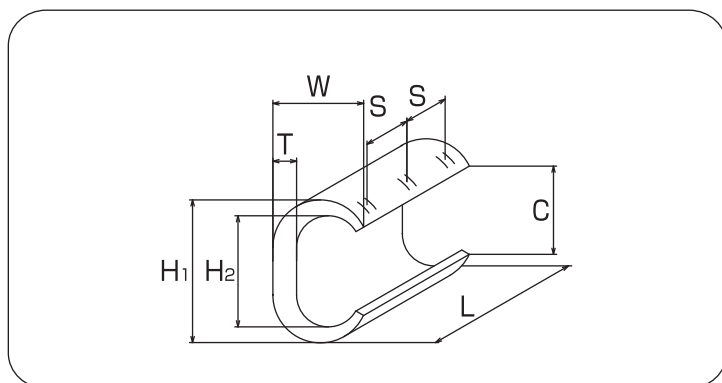

RoHS II P.1をご覧ください。

品番	寸法 mm						圧縮回数と位置		適用電線 合計断面積 mm ²	包装 数	適合工具				
	H1	H2	W	L	T	C	回数	S			EH-2C	15号B	EP-16	16号B ヘッド	EP-520C ヘッド
T-11	9.5	6.3	6.2	12	1.6	4	2	6	7.5~11	500	●	●	●	●	
T-16	11.8	7.8	7.3	13	2	5	2	7	11.5~16	300	●	●	●	●	
T-20	12.8	8.6	9.7	13	2.9	5.1	1	-	14~20	300		●	●	●	
T-26	14.7	10.2	10.9	16	3.2	6.5	1	-	21~26	200		●	●	●	
T-44	19	13.4	14.4	20	4	8.5	1	-	27~44	100		●	●	●	
T-60	21	15.4	15.1	22	4	9.7	2	11	45~60	80		●	●	●	
T-76	24.4	17.3	17.6	22	5	10.8	2	11	61~76	50		●	●	●	
T-98	27.8	20.8	18.8	25	5	13.8	2	11	77~98	50		●	●	●	
T-122	29.8	22.1	21.2	26	5.5	13.5	2	12	99~122	50		●	●	●	●
T-154	34	25.7	24.4	28	6	17	3	8.5	123~154	40			●	●	●
T-190	37	28.5	25.4	35	6	17.4	3	10.5	155~190	20			●	●	●
T-240	40	30.2	28.5	40	7	19	3	13	191~240	15			●	●	●
T-288	44.5	34.7	31.1	45	7	22.3	3	14.5	241~288	10			●	●	●
T-365	47.5	37.7	34	50	7	24.8	3	16	289~365	10			●	●	●
T-450	57.5	42.5	41	60	10	28	3	18.5	366~450	6					●
T-560	62	46	45	65	11	31	3	20	451~560	4					●
T-700	68	51	49.5	70	12	34	3	21	561~700	3					●

上記の工具の他、充電式工具もございます。お問い合わせ下さい。

T形コネクタ電線組合せ表

分岐線mm ² / 本線mm ²	2 (φ1.6)	3.5 (φ2.0)	5.5 (φ2.6)	8	14	22	38	60	100	150	200	250	325
5.5(φ2.6)	11	11	11										
8	11	16	16	16 / 20									
14	16 / 20	20	20	26	44								
22	26	26	44	44	44	44							
38	44	44	44	60	60	60	76						
60	76	76	76	76	76	98	98	122					
100	122	122	122	122	122	122	154	190	240				
150	154	154	190	190	190	190	190	240	288	365			
200	240	240	240	240	240	240	240	288	365	365	450		
250			288	288	288	288	288	365	365	450	450	560	
325			365	365	365	365	365	450	450	560	560	700	700
400							450	560	560	560	700	700	
500							560	560	700	700	700		
600							700	700	700				

表中の数値はT形コネクタの品番「T-」を示す。