


高純度の銅条・銅板より製造される圧着端子で、R型・RD型はJIS規格、UL規格(カナダ向け認証含む)に適合しております。



銅線用裸圧着端子(R型)

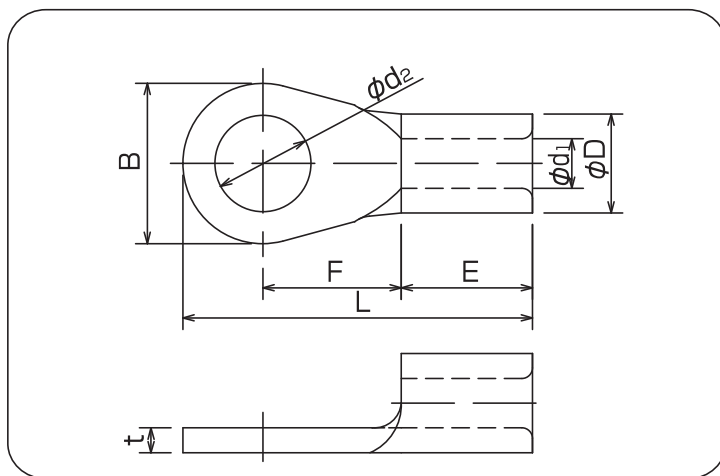

RoHSII P.1をご覧ください。

単位:mm

呼 び		φd ₂	B	L	F	E	φD	φd ₁	t	電線抱合容量(参考)			適合工具	一箱入数		
										単線mm	撚線mm ²	AWG				
8	8-4	4.3	12	23.8	9.7	8.1	7.1	4.5	1.2	2.89 ∟ 3.65	6.64 ∟ 10.52	8	5N18 214A REC-Li14S1 nano18	300 (100×3)		
	8-S4		9.5	22.55												
	8-5	5.3	12	23.8												
	8-S5		9.5	22.55												
	8-L5	6.4	15	29.6	14											
	8-6		12	23.8												
	8-S6	6.4	9.5	22.55	9.7											
	8-L6		15	29.6											14	
	8-8	8.4	32	50	25.9	8.1										
	8-10	10.5														
	8-12	13	20											33.5	15	8.5
	8-14	15	32											50	25.9	8.1
	8-16	17														
	8-18	19														
8-20	21															
14	14-S5	5.3	10	28.5	13.5	10	9.0	5.8	1.5	3.65 ∟ 4.62	10.52 ∟ 16.78	6	214A 9H-60 EP-1460 EP-150A REC-Li14S1 REC-Li60S1 REC-Li150S1 REC-Li200S1	100		
	14-S6	6.4														
	14-S8	8.4	12	29.5												
	14-5	5.3														
	14-6	6.4	16	32.8	14.8											
	14-8	8.4														
	14-10	10.5	22	39.3	18.3											
	14-12	13														
	14-14	15	30	49	24											
	14-16	17														
	14-18	19														
	14-20	21														

- (注意) ・各部の寸法は予告なく変更することがあります。
 ・太字は、JIS規格品です。
 ・UL登録品として御使用の場合、ご注文時にご指示下さい。
 ・斜体はUL登録工具です。詳しくはパッケージの説明書をご覧ください。