


銅線用裸圧着端子(RD型)

高純度の銅条・銅板より製造される圧着端子で、R型・RD型はJIS規格、UL規格(カナダ向け認証含む)に適合しております。

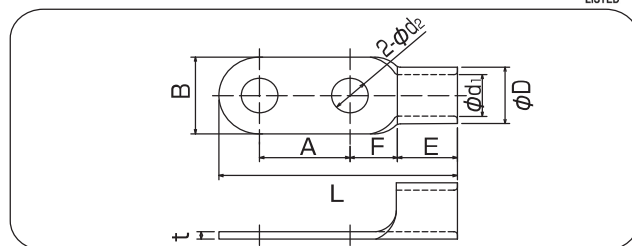

RoHSII p.1をご覧ください。

単位:mm

呼 び	φd ₂	B	L	A	F	E	φD	φd ₁	t	電線抱合容量(参考)			適合工具	一箱入数
										単線mm	撚線mm ²	AWG		
38	RD38-0 △	—	22	84	—	13.5	13.3	9.4	1.8	5.81	26.66	2	9H-60 EP-1460 EP-150A REC-Li60S1 REC-Li150S1 REC-Li200S1	50
	RD38-10	11			32					7.34	42.42			
	RD38-12	14			40					7.34	42.42			
60	RD60-S0 △	—	22	81	—	18.5	15.5	11.4	2.0	7.34	42.42	1/0	EP-150A REC-Li150S1 REC-Li200S1	50
	RD60-10	11			32					7.34	42.42			
	RD60-L0 △	—			—					7.34	42.42			
	RD60-12	14	32	89	40					8.26	60.57			
	RD60-LLO △	—			—					8.26	60.57			
	RD60-14	16			40					8.26	60.57			
70	RD70-S0 △	—	24	83	—	20	17.5	13.5	2.0	8.26	60.57	2/0	EP-150A REC-Li150S1 REC-Li200S1	30
	RD70-10	11			32					8.26	60.57			
	RD70-L0 △	—			—					8.26	60.57			
	RD70-12	14	32	91	40					9.27	76.28			
	RD70-LLO △	—			—					9.27	76.28			
	RD70-14	16			40					9.27	76.28			
80	RD80-S0 △	—	27	86	—	20	19.5	14.5	2.3	9.27	76.28	3/0	EP-150A REC-Li150S1 REC-Li200S1	30
	RD80-10	11			32					9.27	76.28			
	RD80-L0 △	—			—					9.27	76.28			
	RD80-12	14	32	94	40					10.41	96.3			
	RD80-LLO △	—			—					10.41	96.3			
	RD80-14	16			40					10.41	96.3			
100	RD100-S0 △	—	28.5	87	—	20	22.3	16.4	2.6	10.41	96.3	4/0	EP-150A REC-Li150S1 REC-Li200S1	30
	RD100-10	11			32					10.41	96.3			
	RD100-L0 △	—			—					10.41	96.3			
	RD100-12	14	32	95	40					11.68	117.2			
	RD100-LLO △	—			—					11.68	117.2			
	RD100-14	16			40					11.68	117.2			
150	RD150-0 △	—	36	105.5	—	26.5	26.5	19.5	3.2	11.68	117.2	250-300 MCM	S7G-J325R	20
	RD150-12	14			40					13.8	152.05			
	RD150-14	16			21					13.8	152.05			
180	RD180-0 △	—	38.5	111	—	30.5	28.5	22	3.2	13.8	152.05	350 MCM	12号A	20
	RD180-12	14			40					13.8	152.05			
	RD180-14	16			21.25					15.6	192.6			
200	RD200-0 △	—	44	117	—	32	32.7	24	4.0	15.6	192.6	400 MCM	REC-Li200S1	10
	RD200-12	14			40					17.5	242.27			
	RD200-14	16			23					17.5	242.27			
250	RD250-12△	14	44	118	40	31.5	35.6	26	4.5	—	250	500 MCM	S7G-M325R	10
	RD250-14△	16			24.5					—	250			
325	RD325-0 △	—	50.5	124	—	36.5	37.6	28	4.5	17.5	242.27	500-600 MCM	S7G-J325R	10
	RD325-12	14			40					20.3	325.0			
	RD325-14	16			22.25					20.3	325.0			

(注意) ・各部の寸法は予告なく変更することがあります。・太字は、JIS規格品です。・呼び0,S0,L0,LL0にはd2穴がありません。
・UL登録品として御使用の場合、ご注文時にご指示下さい。・△はUL登録品ではありません。・斜体はUL登録工具です。詳しくはパッケージの説明書をご覧ください。